
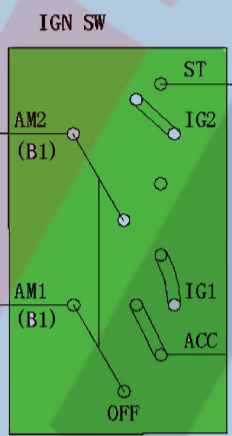


کاربرد	فیوز	آمپر
فیوز لامپ نور بالای چپ	FB01	10A
فیوز لامپ نور بالای راست	FB02	10A
فیوز محافظ سوئیچ دینر/لامپ نور پایین چپ	FB03	10A
فیوز لام نور پایین راست	FB04	10A
فیوز کمپرسور کولر	FB05	10A
فیوز پمپ بنزین	FB06	15A
فیوز سنسور اکسیژن عقب	FB07	5A
فیوز انژکتور و کونل	FB08	10A
فیوز کنیستر و EMS	FB09	7.5A
فیوز سنسور اکسیژن جلو	FB10	5A
فیوز EMS	FB11	5A
فیوز گرمکن شیشه عقب	FB12	25A
فیوز چراغ مه شکن جلو چپ و راست و بونیت BCM	FB13	15A
فیوز رزرو	FB14	15A
فیوز رله گیربکس CVT	FB15	15A
فیوز ABS/EMS/EPS	FB16	7.5A
فیوز لامپ دنده عقب / گیربکس	FB17	10A
فیوز شیربرقی ABS	FB18	25A
فیوز رزرو	FB19	15A
فیوز رزرو (نکمه استارت)	FB20	20A
فیوز رزرو (نکمه استارت)	FB21	25A
فیوز محافظ جریان	FB22	30A
فیوز رزرو	FB23	10A
فیوز	FB24	5A

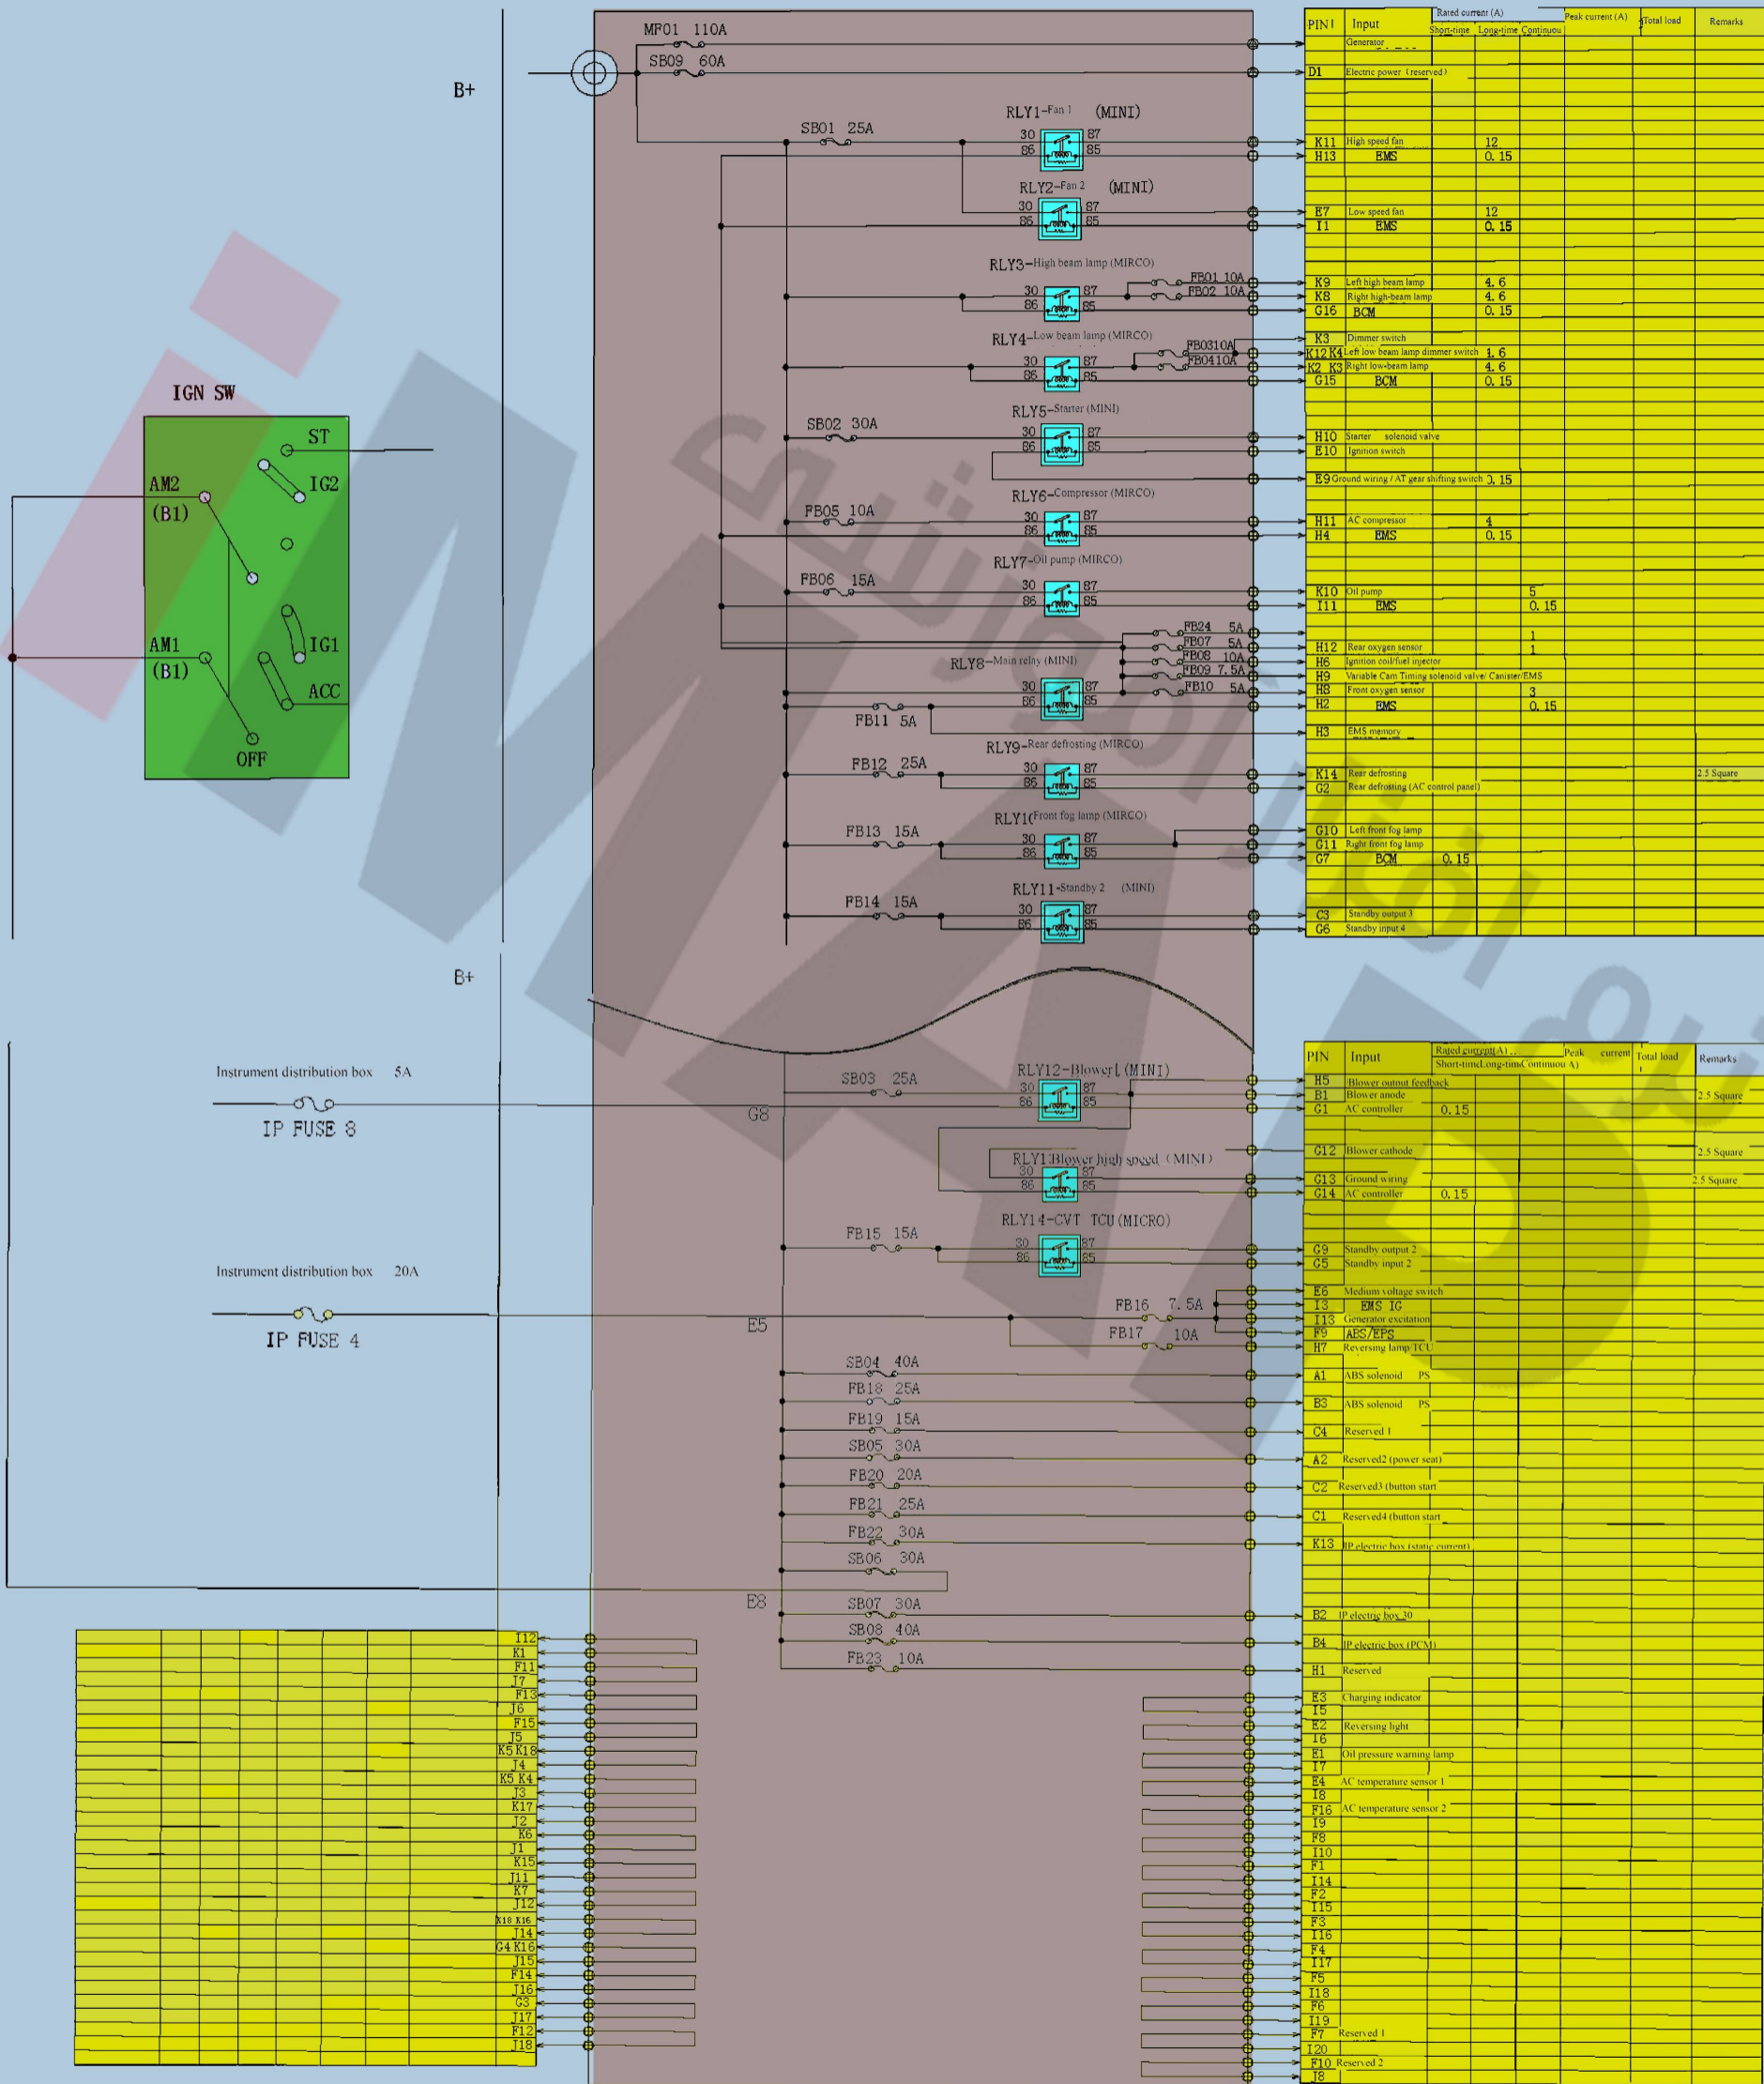

PIN I	Input	Rated current (A)			Peak current (A)	Total load	Remarks
		Short-time	Longtime	Continuous			
	Generator						
D1	Electric power (reserved)						
K11	High speed fan		12				
H13	BMS		0.15				
E7	Low speed fan		12				
I1	BMS		0.15				
K9	Left high beam lamp		4.6				
K8	Right high-beam lamp		4.6				
G16	BCM		0.15				
K3	Dimmer switch						
K12 K4	Left low beam lamp dimmer switch		1.6				
K2 K3	Right low-beam lamp		4.6				
G15	BCM		0.15				
H10	Starter solenoid valve						
E10	Ignition switch						
E9	Ground wiring / AT gear shifting switch		0.15				
H11	AC compressor		4				
H4	BMS		0.15				
K10	Oil pump			5			
I11	BMS			0.15			
H12	Rear oxygen sensor			1			
H6	Ignition coil/fuel injector			1			
H9	Variable Cam Timing solenoid valve/ Canister/EMS						
H8	Front oxygen sensor			3			
H2	BMS			0.15			
H3	EMS memory						
K14	Rear defrosting					2.5 Square	
G2	Rear defrosting (AC control panel)						
G10	Left front fog lamp						
G11	Right front fog lamp						
G7	BCM		0.15				
C3	Standby output 3						
G6	Standby input 4						

PIN	Input	Rated current (A)			Peak current	Total load	Remarks
		Short-time	Longtime	Continuous			
H5	Blower output feedback						
B1	Blower anode						2.5 Square
G1	AC controller		0.15				
G12	Blower cathode						2.5 Square
G13	Ground Wiring						
G14	AC controller		0.15				2.5 Square
G9	Standby output 2						
G5	Standby input 2						
E6	Medium voltage switch						
I3	BMS IG						
I13	Generator excitation						
F9	AES/EPS						
H7	Reversing lamp/TCU						
A1	ABS solenoid PS						
B3	ABS solenoid PS						
C4	Reserved 1						
A2	Reserved2 (power seat)						
C2	Reserved3 (button start)						
C1	Reserved4 (button start)						
K13	IP electric box (static current)						
B2	IP electric box_30						
B4	IP electric box (PCN)						
H1	Reserved						
E3	Charging indicator						
I5							
E2	Reversing light						
I6							
E1	Oil pressure warning lamp						
I7							
E4	AC temperature sensor 1						
I8							
F16	AC temperature sensor 2						
I9							
F8							
I10							
F1							
I14							
F2							
I15							
F3							
I16							
F4							
I17							
F5							
I18							
F6							
I19							
F7	Reserved 1						
I20							
F10	Reserved 2						
I8							

	I12
	K1
	F11
	I7
	F13
	J6
	F15
	I5
	K5 K16
	I4
	K5 K4
	I3
	K17
	I2
	K6
	I1
	K15
	J11
	K7
	I12
	K18 K16
	I14
	G4 K16
	I15
	F14
	I16
	G3
	I17
	F12
	I18